

Riga MT UGR

- Tracklight
- Linear
- Fixed



Project:
Type:
Contact:



ORDERING INFO

L1 RIGMU

MODEL	Wattage	Kelvin	CRI	Lens	mA	Voltage	Length Inches	Color
RIGMU: Riga MT UGR	05 : 5W	30 : 3000k	B : 95	UG : UGR < 19	250 : 250mA	2448 : 24/48V	12 : 12"	BK : Black
	09 : 9W		C : 90		350 : 350mA		24 : 24"	WS : White
	13 : 13W		500 : 500mA		36 : 36"			

Notes:

Drivers are designed with universal input voltage compatibility, accommodating a range from 120V to 277V.

PERFORMANCE INFO

3000K Power 90 CRI Performance

Length	12"	24"	36"
Performance Options	5W	9W	13W
Delivered Lumens [lm]	510	1021	1532
Efficacy [lm / W]	88.8	93.7	94.5
Weight [lb]	0.5	1.2	1.3

3000K Power 95 CRI Performance

Length	12"	24"	36"
Performance Options	5W	9W	13W
Delivered Lumens [lm]	413	826	1239
Efficacy [lm / W]	72.4	77.9	76.9
Weight [lb]	0.5	1.2	1.3

SPECIFICATIONS

LED Source

Tool-free field-replaced LED module.SDCM Binning ≤ 3.

Material

Aluminum body, available in black embossed and white embossed.

Beams

Linear light module, polycarbonate UGR reflector + polyamide cover, UGR<19 .

Fixture Retention

Simple to install through mechanical fixing to track.

Life

50 Khr L90B5: at least 95% of LEDs maintain 90% of initial lumens after 50,000 hours. Operating temperature: -4°F to 104°F (-20°C +40°C).

Label

UL listed for US Canada. CE labeled.


Warranty

5 years limited warranty.


<https://zanibonilighting.com/terms-and-conditions.html>

Dimensions / Drawings

12 In

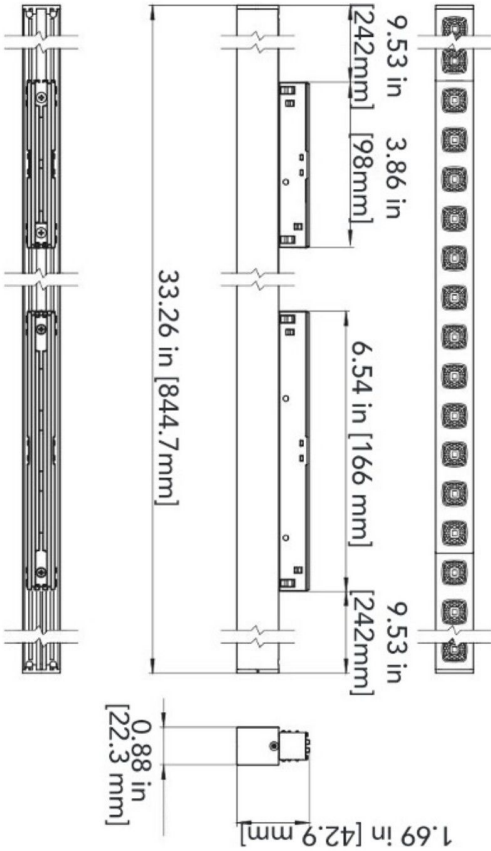

24 In

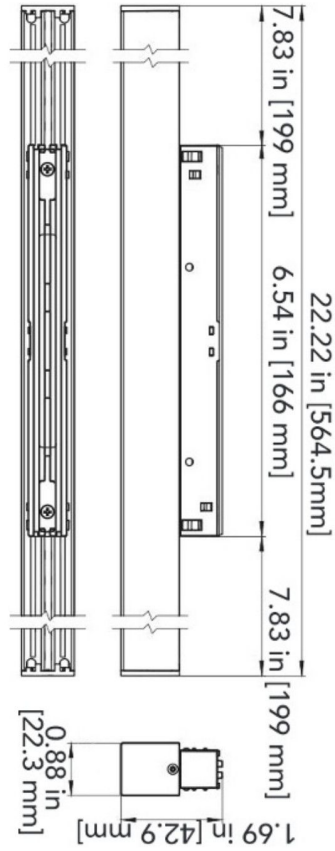

36 In

